



QUICK CHANGE

Brass coupling nut with double O-ring seal

PRECISE EASY CONTROL

“Ease on” cutting oxygen valve

PROMIX™ INSIDE

Flashback and burn back resistant

LONGER LASTING

Super tough stainless tubes and cutting oxygen lever

MAXIMUM DURABILITY

Die forged brass torch body and head

CA-2460 & CA-1350
Cutting Attachments

DURABLE PROMIX™

Proven design and precision machined parts insure maximum performance and long lasting heat and flashback resistance.

HIGH PERFORMANCE EQUAL PRESSURE MIXER

Generates maximum pre-heat flame and cutting temperatures. Rugged mixer design stands up

to all types of adverse conditions, improper settings and heavy reflective heat applications.

USE ANY FUEL GAS – PROMIX™ UNIVERSAL MIXER

You'll get high performance with all fuel gas types by simply selecting the proper tip for your selected fuel gas.

LESS DOWN TIME

Increase your efficiency and productivity by spending less time on consumables replacement and repair with longer lasting American Torch Tip equipment.

100% TESTED

All American Torch Tip products and ProMix™ mixers are 100% leak and/or flashback tested.



CA-2460 & CA-1350 Cutting Attachments

SPECS

VICTOR STYLE

CA-2460-D (Heavy Duty)
CA-1350-D (Medium Duty)

FITS WELDING HANDLE

WH-100
WH-315

METAL THICKNESS

Up to 8" or 204mm
(See table below)

WELDING NOZZLE

Victor Style

GAS TYPE


Acetylene
Propylene
Natural Gas/Propane

HEAD ANGLE

90 degrees

TIP SERIES

3-101
1-101

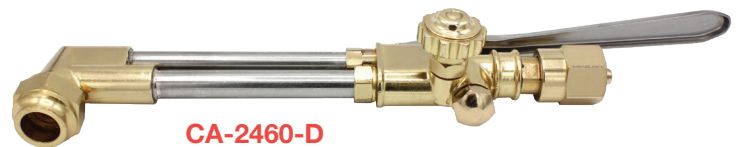

| Part # | Desc | Cutting Range | Welding Range | Tip Series | Head Angle | Weight Pounds | Length Inches |
|-----------|---|---------------|---------------|------------|------------|---------------|---------------|
| CA-1350-D | Medium Duty Cutting Attachment (use with WH-100 Handle) | 6" (152 mm) | 1/8" (3 mm) | 3-101 | 90° | .895 lbs | 10.125" |
| CA-2460-D | Heavy Duty Cutting Attachment (use with WH-315 Handle) | 8" (204 mm) | 3/8" (9 mm) | 1-101 | 90° | 1.876 lbs | 13.5" |