


VSR-350 SERIES
Pressure Regulators



VSR-360-510 Acetylene Regulator shown

SOLID CONSTRUCTION AND DESIGN


- Forged brass body and housing cap
- 2 1/2" Gauges
- 2 3/4" Diaphragm - reinforced neoprene
- High pressure relief valve - External self-resetting
- Sintered bronze inlet filter

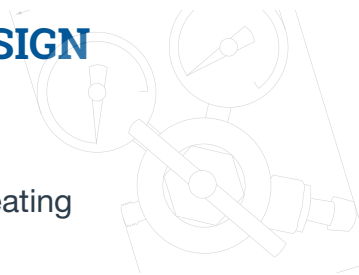

Shown:
VSR-350-540
Oxygen
Regulator

STRICT STANDARDS

All American Torch Tip oxy-fuel and gas apparatus products are leak and performance tested.

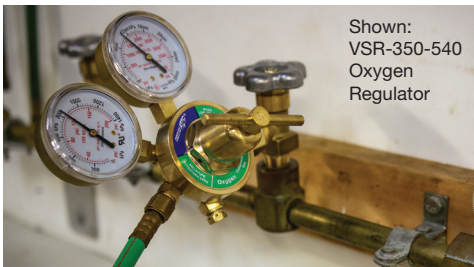

Shown:
VSR-350-540
Oxygen
Regulator



VSR-350 SERIES

Pressure Regulators

SPECS

Applications and Uses

Medium-Heavy Duty Single Stage
Welding & Cutting Applications:
 Industrial and Commercial, Metal
 Fabrication, Maintenance, Construction,
 Petrochemical

Dimensions

7 1/2"W x 6 1/2"H x 4"D
 (19.23mm x 16.27 x 11.53cm)

Weight

3lb. 8oz. (1.74kg)

Part Number	Gas Service	Max Inlet Pressure (PSIG)	Delivery Range (PSIG)	Delivery Gauge (PSIG)	Supply Gauge (PSIG)	Inlet Connection
VSR-350-540	Oxygen	3000	5-100	0-100	0-4000	CGA 540
VSR-360-510	Acetylene	3000	2-15	0-30	0-400	CGA 510
VSR-360-300	Acetylene	3000	2-15	0-30	0-400	CGA 300
VSR-361-510	LP/Natural Gas/ Propylene	3000	2-40	0-60	0-400	CGA 510

NOTE: Regulators will deliver at least the stated upper range at no flow and in some cases may exceed the stated upper range