
36 BERNARD®



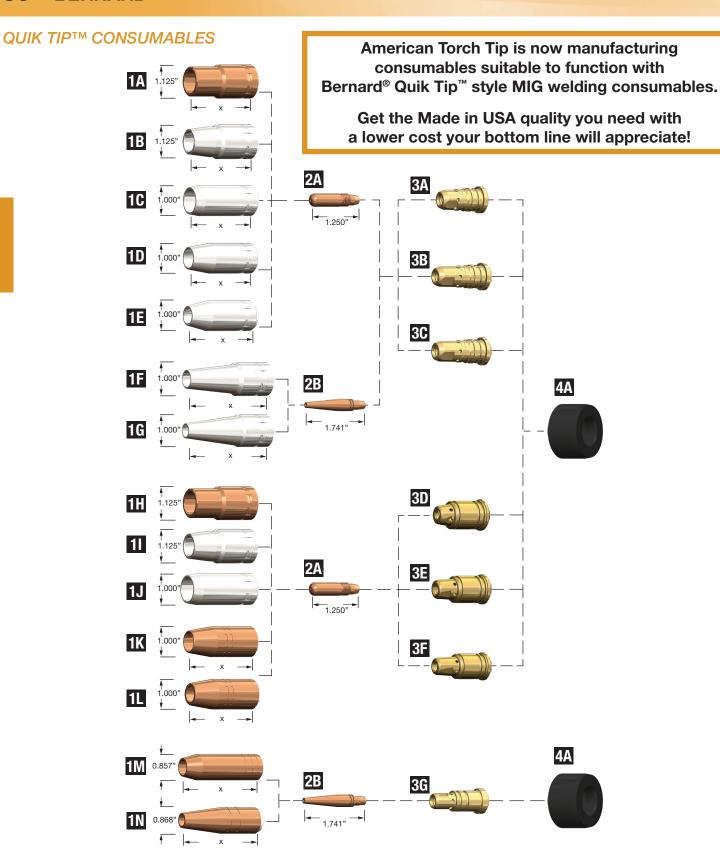

QUIK TIPTM CONSUMABLES

1.	NOZZL	ES		I.D. LE	NGTH	3.	DIFFUS	ERS	
Α	N1C34H0				2.351"	Α	D114Q	1/4" Recess	Threaded
В	N1C58H0				2.327"	В	D118Q	1/8" Recess	Threaded
С	N1C34Q	Nozzle Plated Copp			2.335"	C	D1FQ	1/8" Recess	Threaded
D	N1B34Q	Nozzle Brass			2.335"	D	D114	1/4" Recess	Slip-On
D	N1C58Q N1B58Q	Nozzle Plated Copp Nozzle Brass			2.335" 2.335"	E F	D118 D1F	1/8" Recess Flush	Slip-On Slip-On
Е	N1C12Q	Nozzle Blass Nozzle Plated Copp			2.349"	G	D118	1/8" Recess	Slip-On
F	N2C12H		er		2.865"	ч	DZIO	170 1100033	Olip-Oli
G					2.865"	4.	INSULA	TORS	
Н	N1C34HI			3/4"					Dulahari
ı	N1C58HI			5/8"		Α	4423R	Insulator	Rubber
J	N1C34	Nozzle Copper		3/4"					
K	N1C58	Nozzle Copper			2.335"				
L	N1C12	Nozzle Copper			2.335"				
M	N2C12	Nozzle Copper			2.865"				
N	N2C38	Nozzle Copper			2.795"				
2. CONTACT TIPS O.D.									
Series 1 Contact Tips									
	A T1023 Contact Tip 0.023" (0.6 mm) 0.310"								
	T1030	Contact Tip 0.030"	(0.8 mm)	0.310"					
	T1035	Contact Tip 0.035"	(0.8 mm)	0.310"					
	T1039 T1045	Contact Tip 0.039" Contact Tip 0.045"	(1.0 mm)	0.310" 0.310"					
	T1364	Contact Tip 0.045 Contact Tip 3/64"	(1.2 mm) (1.2 mm)	0.310"					
	T1052	Contact Tip 0.052"	(1.4 mm)	0.310"					
	T1116	Contact Tip 1/16"	(1.6 mm)	0.310"					
	T1068	Contact Tip 0.068"	(1.7 mm)	0.310"					
	T1072	Contact Tip 0.072"	(1.8 mm)	0.310"					
	T1564	Contact Tip 5/64"	(2.0 mm)	0.310"					
	T1332	Contact Tip 3/32"	(2.4 mm)	0.350"					
	T1764	Contact Tip 7/64"	(2.8 mm)	0.350"					
	T1118	Contact Tip 1/8"	(3.2 mm)	0.350"					
Series 2 Contact Tips Taper									
	T2023	Contact Tip 0.023"	Tapered	(0.6 mn	n) 0.310"				
	T2030	Contact Tip 0.030"	Tapered	(0.8 mn					
	T2035	Contact Tip 0.035"	Tapered	(0.9 mn	n) 0.310"				
	T2045	Contact Tip 0.045"	Tapered	(1.2 mn					
	T2364	Contact Tip 3/64"	Tapered	(1.2 mn					
	T2052	Contact Tip 0.052"	Tapered	(1.4 mn					
	T2116	Contact Tip 1/16"	Tapered	(1.6 mn	n) 0.310"				
Available in packages of 25 contact tips									